

430451


Technical Specification

Emergency

Grafham Universal Emergency Pack



Grafham Universal Emergency Pack

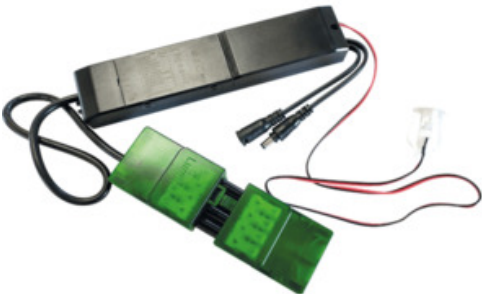

General Data

| | |
|--------------------------------|---|
| Mounting options | Internal |
| Electrical Connector Type | Quick connector |
| Input Cable | 0.75-2.5mm ² |
| Input Electrical Connection | Neutral P Live |
| General Application | Residential Commercial Industrial Educational |
| Operating Temperature Range °C | 0 - +30 |
| Warranty (Years) | 3 |

430451

Technical Specification

Electrical Data

| | |
|------------------------------------|------------------|
| Wattage (W) | 2 |
| Total Power Consumption (W) | <4 |
| Mains voltage (V) | 220 - 240 |
| Electrical protection | Class II |
| Driver Output (V) | 20-60 |
| Driver Output Current (mA) | 30-100 |
| Control Gear Type CC or CV | Constant Current |
| Driver Brand | Lumineux |
| Inrush Current (A) | 30 |
| Nominal Frequency (Hz) | 50/60 |

Emergency Data

| | |
|-----------------------------------|----------|
| Battery Type | LiFeP04 |
| Battery Capacity (mAh) | 1800mAh |
| Battery Warranty (Years) | 1 |
| Recharge Time (Hours) | 24 Hours |
| Test Procedure | Manual |
| Emergency Duration (Hours) | 3 |

Physical Data

| | |
|------------------------------------|-------|
| Housing colour | Black |
| Body material | ABS |
| IP Rating | 20 |
| Nominal Product Length (mm) | 219 |
| Nominal Product Width (mm) | 42.5 |
| Nominal Product Height (mm) | 23 |
| Weight (kg) | 0.191 |

430451

Technical Specification

Standards and Approvals

| | |
|-------------------------------|----------------------|
| Manufactured In Accordance To | EN 60598-1 |
| CE Mark | Yes |
| UKCA Mark | Yes |
| WEEE Symbol | Yes |
| Certificate Of Conformity | Available on Request |
| Accredited Members | LIA, ISO9001 |